




**MOELLER PARKING LOT EXPANSION
SYCAMORE TOWNSHIP
LANDSCAPING PLAN**

PLANTING MATERIALS LIST

QTY.	COMMON NAME	BOTANICAL NAME	SIZE	ROOT
TREES				
3	AUTUMN BRILLIANCE SERVICEBERRY	AMELANCHIER X G. 'A. BRILLIANCE'	2.5" CAL.	B&B
2	WINTER KING HAWTHORN	CRATAEGUS V. 'WINTER KING'	2.5" CAL.	B&B
7	AUTUMN GOLD GINKGO	GINKGO B. 'AUTUMN GOLD'	2.5" CAL.	B&B
29	WHITE SPRUCE	PICEA GLAUCA	7' HGT.	B&B
3	AMERICAN SENTRY LINDEN	TILIA C. 'AMERICAN SENTRY'	2.5" CAL.	B&B
12	RED SUNSET RED SUNSET	ACER RUBRUM 'RED SUNSET'	2.5" CAL.	B&B
4	NORWAY SPRUCE	PICEA ABIES	7' HGT.	B&B
SHRUBS				
7	OAKLEAF HYDRANGEA	HYDRANGEA QUERCIFOLIA	30"	#5 CONT.
57	SEA GREEN JUNIPER	JUNIPERUS CH. 'SEA GREEN'	24"	#5 CONT.
39	DENSE YEW	TAXUS DENSIFORMIS	24"	B&B
14	COMPACT EUROPEAN VIBURNUM	VIBURNUM OPULUS 'COMPACTUM'	24"	B&B
10	VANHOUTTE SPIREA	SPIRAEA VANHOUTTEI	30"	B&B

GENERAL NOTES

- A. INSTALL 3" LAYER OF SHREDDED WOOD BARK MULCH TO ALL PLANT BEDS.
- B. ALL PLANTS OCCURRING IN A CONTINUOUS ROW OR FORMAL ARRANGEMENT SHALL HAVE UNIFORM HEIGHT AND SPREAD AND HABIT OF GROWTH.
- C. ALL SHRUB BEDS SHALL BE EXCAVATED AND BACKFILLED AS SHOWN. ALL PLANT BEDS SHALL HAVE A SPADE-FORMED EDGE WITH SMOOTH TANGENTS BETWEEN CURVES. NO BROKEN-BACK CURVES.
- D. SEED ALL AREAS DISTURBED BY CONSTRUCTION THAT ARE NOT MULCHED PLANT BEDS.

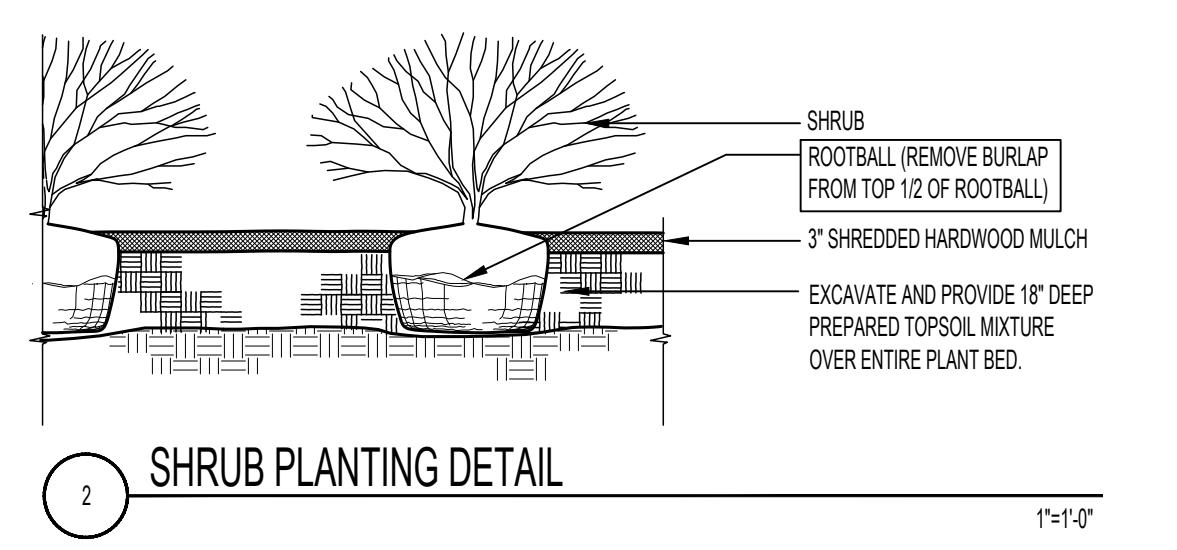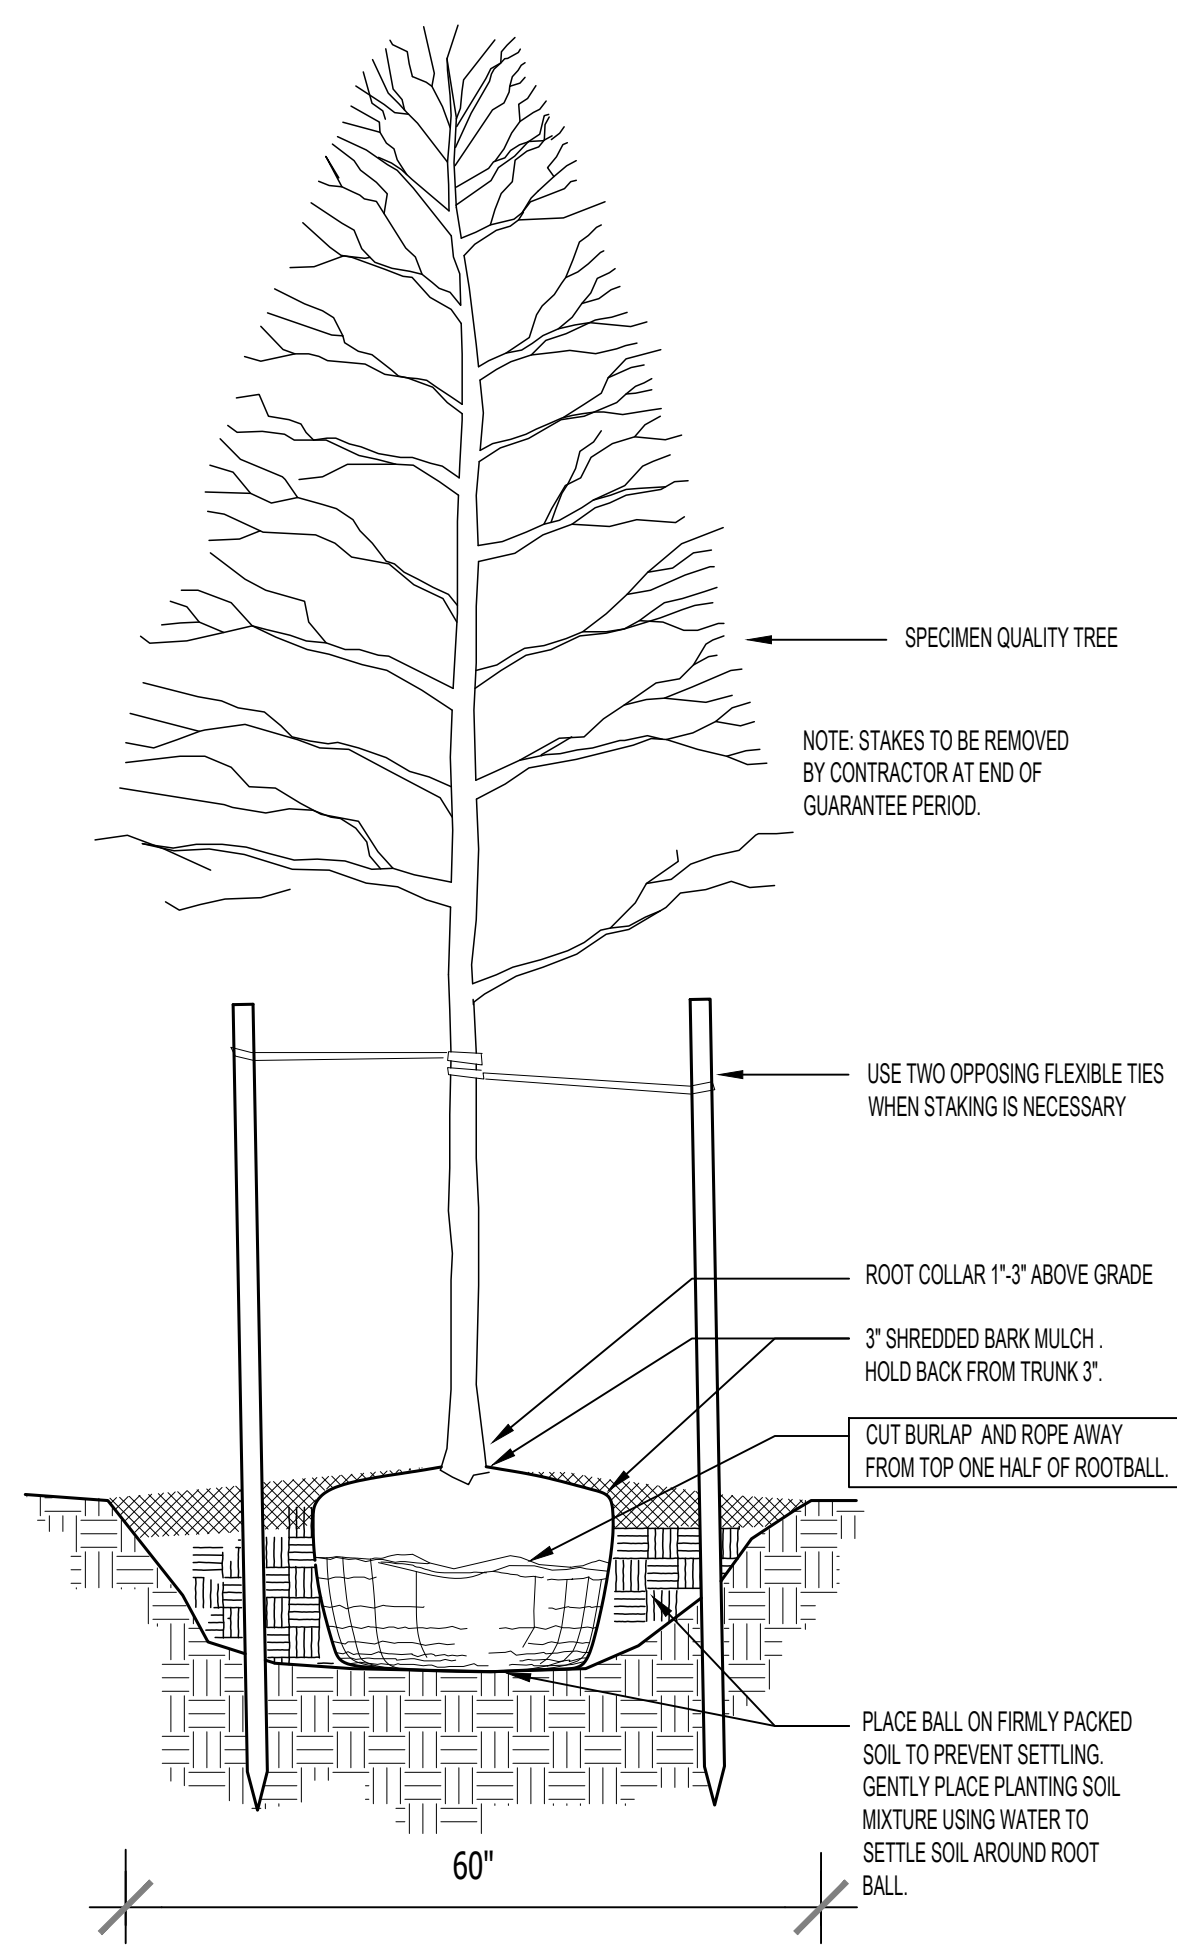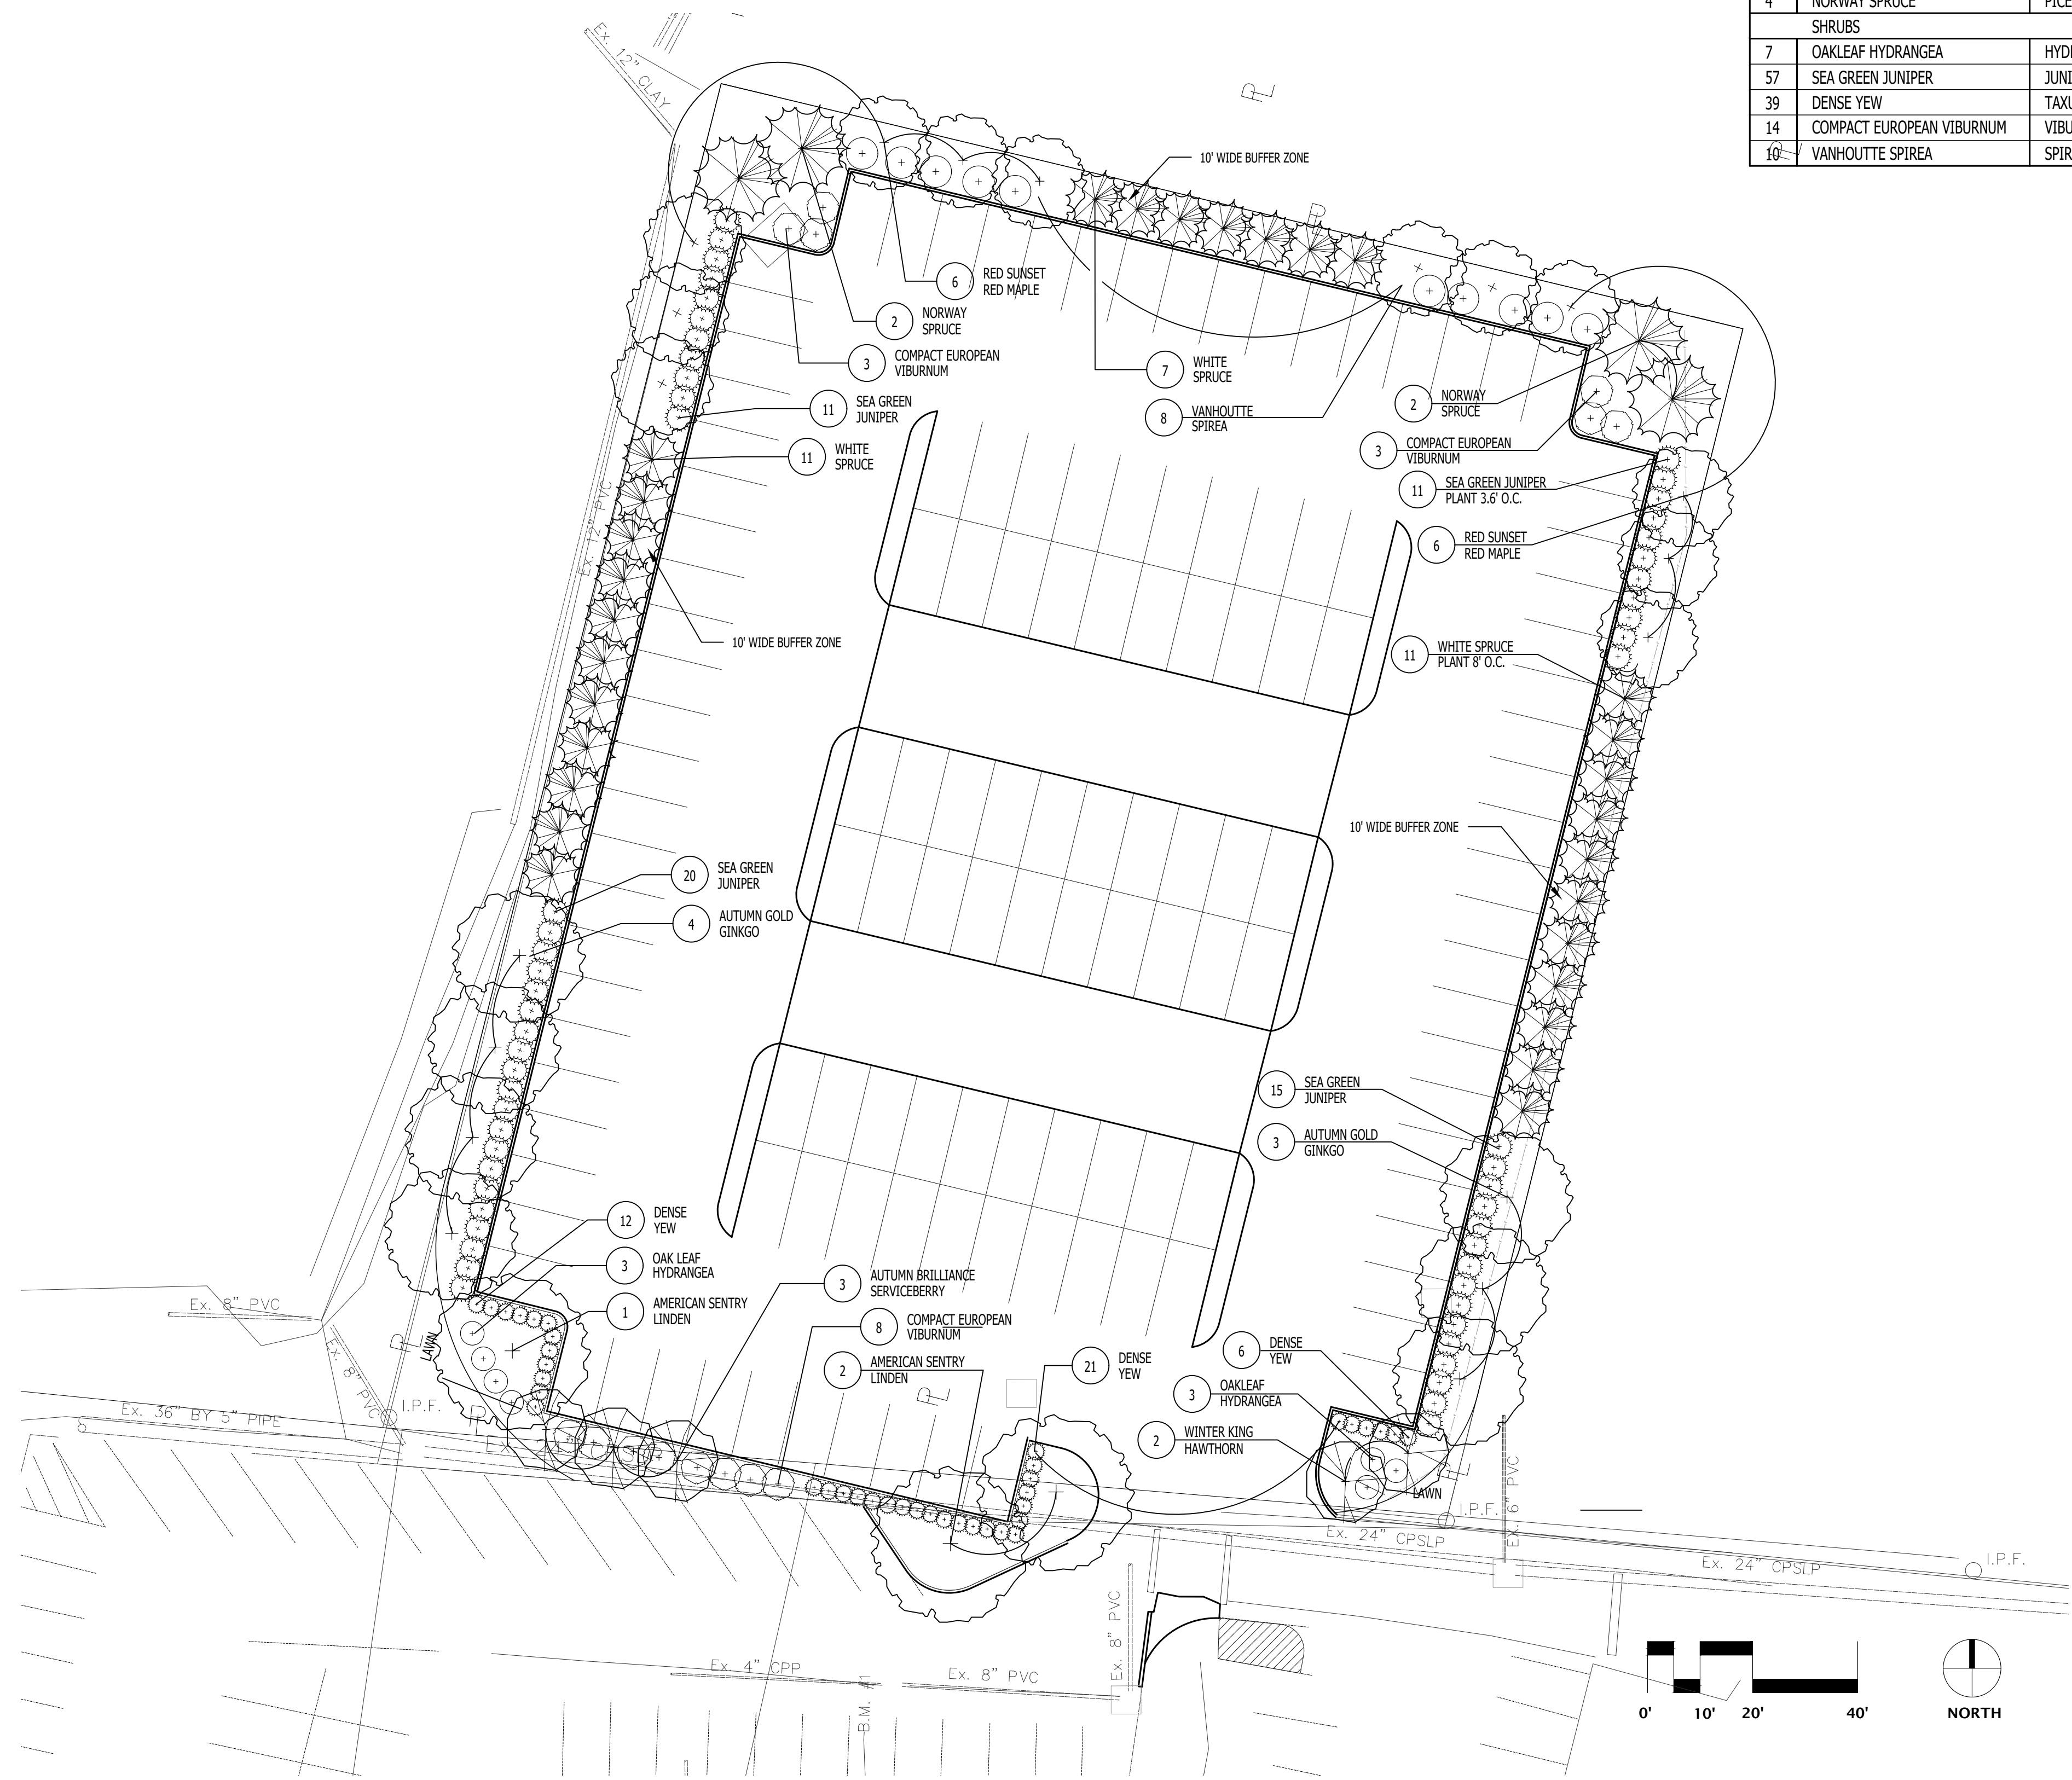

REVISIONS:

FILE NAME	LANDSCAPING
DRAWN BY	CLD
CHECKED BY	NNS
PROJECT No.	HAMSYC1806
DATE	04-13-2018
SHEET NUMBER	5 OF 5